

# Azote Foams for ESD Protection



## CONDUCTIVE v STATIC DISSIPATIVE v ANTI-STATIC

A static charge can be generated triboelectrically on all three types of material.

The difference is the speed at which the static charge travels through the material when it makes contact with a conductive material or ground. This is a function of the resistivity of that material.

Conductive foams have 'bulk' or isotropic conductivity. They have a volume resistivity of less than  $10^4$  ohms.cms or a surface resistivity of less than  $10^4$  ohms/sq according to the ESD Association.

Static Dissipative foams offer a slower, more controlled transfer of a static charge and have volume resistivity in the range  $10^4$  –  $10^{11}$  ohms.cms and surface resistivity between  $10^4$  and  $10^{11}$  ohms/sq.

These classifications vary between standards. For further details see the section "Compliance with Standards"

Anti-static foams are generally pink and are characterised by having a surface resistivity between  $10^{10}$  and  $10^{12}$  ohms although some may have surface resistivity higher than this. They may have a degree of inherent conductivity but provide only limited protection from ESD events.

Many rely on surface treatments to provide this conductivity. The dissipative performance of such materials is enhanced by increasing atmospheric humidity whereas static charge build-up becomes more of a potential problem as RH reduces.

## AZOTE STATIC DISSIPATIVE AND CONDUCTIVE FOAMS

Azote conductive and static dissipative materials can be cut, routed, shaped, welded, laminated and thermoformed to meet specific use requirements. They exhibit a range of beneficial properties for the electronics industry:

### OUTSTANDING PROPERTIES

- Consistent, isotropic conductivity
- High purity
- Halogen-free
- VOC-free
- Non-staining, non-corrosive

- Low outgassing
- ROHS compliant
- Non-sloughing
- Moisture resistant
- Easy package pin insertion
- Excellent pin retention
- Good energy absorption and cushioning
- Rugged durability
- Light weight
- Uniform density profile

Critical electronics devices, assemblies and equipment are susceptible to "static zap"... Electro Static Discharge (ESD). The smaller IC circuitry becomes the more vulnerable it becomes to this type of damage. The annual direct cost to industry of damage caused by ESD is estimated to be in excess of \$100 billion, on a worldwide basis. Consequential losses are inevitably far greater.

Electrostatic charge is most commonly created by the contact and separation of two materials. E.g. as shoe soles contact and then separate from the floor surface, a static charge is generated. Walking across a vinyl tiled floor can generate 12,000 volts and picking a polythene bag from a bench can generate 20,000 volts... potential that could decimate static sensitive electronics devices.

Zotefoams manufactures a range of high performance, closed-cell, crosslinked, conductive and static dissipative foams which, when used as part of an ESD Control Program Plan, help reduce the occurrence and cost of ESD damage.

Non-conductive closed-cell foams, also available from Zotefoams, are ideal for a variety of sealing and anti-vibration gaskets in a wide range of electrical instruments and equipment from flat panel displays to BIPV solar panels.



## STATIC DISSIPATIVE GRADES

### PLASTAZOTE® LD30SD

is the most widely used static dissipative grade with a volume resistivity of  $10^7$  ohm/sq. It has good cushioning properties and is used for packaging devices, assemblies and electronics equipment, where limited conductivity is required. Suitable for inter process wafer interleaving, box liners, end caps, top/bottom frames, corner blocks and case inserts, Plastazote® LD30SD has a relatively fine cell structure and is virtually stress free.

### PLASTAZOTE® LD40SD

has been developed to meet the higher density specifications required by the Ministry of Defence for static dissipative packaging material. It has a volume resistivity of  $10^7$  ohm/sq and has good pin insertion and retention characteristics, which enable the safe transport of conventional, through-hole IC packages.

Plastazote® LD40SD meets DStan 93-117 for materials used in the packaging of certain munitions, which are susceptible to an electrostatic charge.


## CONDUCTIVE GRADES

### PLASTAZOTE® LD32CN AND LD50CN

grades have excellent energy absorption characteristics for cushion packaging. Plastazote LD32CN has volume resistivity of  $5 \times 10^3$  ohms.cms and exhibits excellent pin insertion and retention characteristics. Plastazote LD50CN has volume resistivity of  $10^3$  ohms.cms and is suitable for devices with standard leads, while LD32CN should be used for devices with delicate leads. These materials are ideal for shunting component leads and PCB edge connections to equalize the charge in individual circuits.

### EVAZOTE® EV45CN AND EV70CN

grades are EVA copolymers and are suitable for many conductive packaging applications such as tote liners where their enhanced flexibility and durability are valued. They have a volume resistivity of  $10^3$  ohms.cms. Evazote conductive grades are used in a variety of other ESD applications including wrist straps, earth straps, grounded bench mats, floor covering, anti-fatigue mats and conductive footwear.

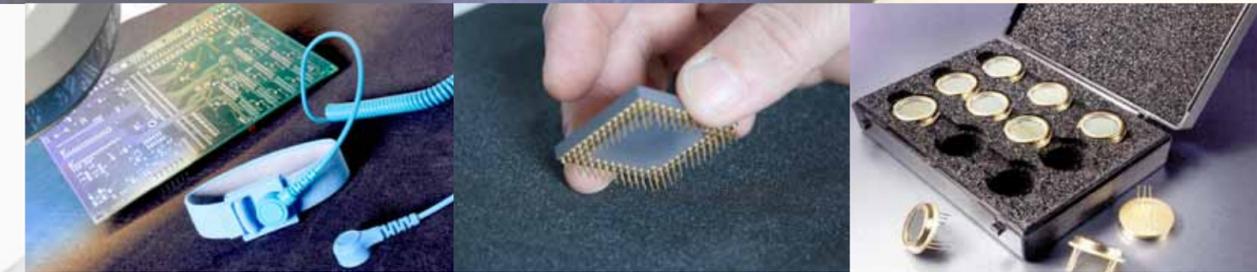

Product Name	Grade	Surface Resistivity	Volume Resistivity
		ohms/sq ESD S-11.11 - 2003	ohms.cms ASTM D991-89
Plastazote	LD30SD	$10^7$	
Plastazote	LD40SD	$10^7$	
Plastazote	LD32CN		$5 \times 10^3$
Plastazote	LD50CN		$10^3$
Evazote	EV45CN		$10^3$
Evazote	EV70CN		$10^3$



## COMPLIANCE WITH STANDARDS

The definitions of conductive foams vary slightly between the different standards. Following is a summary of the Standards that are concerned with ESD protection in packaging and the definition given for materials in these standards. Surface resistivity is tested to ANSI/ESD STM 11.11-2003. Volume resistivity is tested to ASTM D 991-89

### GENERAL STANDARDS: (STATIC DISSIPATIVE MATERIALS)

#### ANSI/ESD S541-2003

Material with a volume resistance equal to or greater than  $10^4$  ohms but less than  $10^{11}$  ohms or surface resistance equal to or greater than  $10^4$  ohms but less than  $10^{11}$  ohms

#### ANSI/ESD STM 11.11- 2003

Material with a surface resistance equal to or greater than  $10^4$  ohms but less than  $10^{11}$  ohms

#### JESD625-A

Material with a volume resistivity between  $10^5$  ohms.cm but less than  $10^{11}$  ohms.cm or surface resistance between  $10^5$  ohms and  $10^{11}$  ohms

#### Military Standards:

#### DStan 93-117

Material with a surface resistance of  $10^5$  ohms to  $10^9$  ohms and a density between  $40 \text{ kg/m}^3$  and  $50 \text{ kg/m}^3$  (Plastazote® LD40SD)

#### MIL-HDBK-263B

Material with a volume resistivity equal to or greater than  $10^4$  ohms.cm but less than  $10^{11}$  ohms.cm or surface resistivity equal to or greater than  $10^5$  ohms/sq but less than  $10^{12}$  ohms/sq

### GENERAL STANDARDS: (CONDUCTIVE MATERIALS)

#### ANSI/ESD S541-2003

Material with a surface resistance less than  $10^4$  ohms or volume resistance less than  $10^4$

#### ANSI/ESD STM 11.12

Material with a volume resistance less than  $10^4$  ohms

#### ASTM D991-89 (2005)

Material with a volume resistivity less than  $10^4$  ohms.cm

#### JESD625-A

Material with a surface resistivity less than  $10^5$  ohms/sq or volume resistivity less than  $10^4$  ohms.cm

FOR MORE INFORMATION PLEASE VISIT [WWW.ZOTEFOAMS.COM](http://WWW.ZOTEFOAMS.COM)

ZOTEFOAMS PLC,  
675 Mitcham Road, Croydon, Surrey, CR9 3AL, UK  
Tel: +44 (0) 20 8664 1600  
Fax: +44 (0) 20 8664 1616  
email: [info@zotefoams.com](mailto:info@zotefoams.com)

ZOTEFOAMS INC,  
55 Precision Drive, Walton, Kentucky, 41094, USA  
Tel: +1 859 371 4046 FREE: (800) 362-8358 (US Only)  
Fax: +1 859 371 4734  
email: [custserv@zotefoams.com](mailto:custserv@zotefoams.com)

#### APPROVED AND CERTIFIED SPECIALIST CONVERTER

KEWELL CONVERTERS LIMITED,  
KCL House, Station Road,  
Edenbridge, Kent, TN8 6EG,  
England, UK  
Tel: +44 (0)1732 864 310  
Fax: +44 (0)1732 865 206  
email: [sales@kewell-converters.co.uk](mailto:sales@kewell-converters.co.uk)  
web: [www.kewell-converters.co.uk](http://www.kewell-converters.co.uk)



AZOTE® is the group brand for a variety of foams manufactured from differing base polymers but using the same unique process route. ZOTEK® is the group brand for foams manufactured from high performance polymers.

AZOTE®, ZOTEK®, PLASTAZOTE®, EVAZOTE® and SUPAZOTE® are worldwide registered trademarks for the current product range which is available through a global distributor and converter network.

Photo acknowledgements: GE Avionics Ltd, The Solder Connection

ADVANCED FOAM  
TECHNOLOGY FOR THE  
**ELECTRONICS**  
INDUSTRY



**AZOTE®**  
high performance  
polyolefin foams



**ZOTEK®**  
advanced  
polymer foams